









More Precision

optoNCDT ILR // Laser-optical distance sensors



High speed sensor for outdoor applications

optoNCDT ILR1171-125

-  Measuring range up to 125 m, (with reflector 270 m)
-  Distance and speed measurements
-  Laser class 1
-  Robust design IP67
-  Very high measuring rate for fast applications
-  Optionally with integrated heating for outdoor applications



The optoNCDT ILR1171 is a laser-based distance sensor for non-contact and precise distance and displacement measurements from 0.2 m up to 125 m. The measuring range can be extended to 270 m with a reflector film. The sensor is designed for very large measuring ranges, with and without reflector. Due to the very high measuring rate of the sensor, moving objects can be measured easily. Even in poor visibility conditions, the ILR1171-125 impresses with its high signal intensity for stable measurements.


Versatile fields of application

The optoNCDT ILR1171-125 is fitted with an integrated heater for outdoor use. A pilot laser is also integrated for mounting and adjustment. This makes it easier to align the sensor over long distances, for example when monitoring buildings. The RS422 and RS485 interfaces ensure reliable and fast data transmission.

Time-of-flight principle

The sensor operates according to the laser pulse runtime principle and is therefore particularly well suited to applications with large distances. Commissioning of the sensor is straightforward due to a variety of interfaces and easy installation options. The actual measuring range depends on the reflectivity and the surface quality of the object to be measured.

Dimensions:

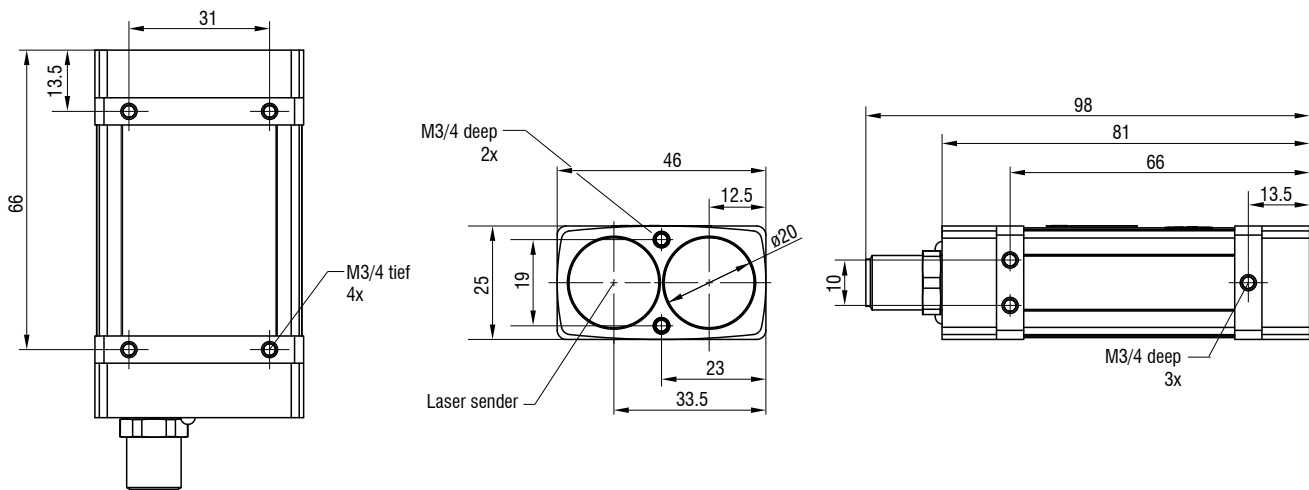

(dimensions in mm, not to scale)

Model		ILR1171-125
Article number		7112027
Measuring range ^[1]	Black 10 %	70 m
	Gray 40 %	100 m
	White 80 %	125 m
	Reflector film ^[2]	270 m
Start of measuring range		0.2 m ^[3]
Measuring rate		40 kHz
Resolution		1 mm
Linearity		< ±60 mm ^[4]
Repeatability ^[5]		<25 mm
Temperature stability		< 20 ppm / K
Light source		Semiconductor laser < 1 mW, 905 nm (red)
Laser class		Class 1 in accordance with IEC 60825-1: 2022-07
Permissible ambient light		50,000 lx
Supply voltage		10 ... 30 VDC
Power consumption		< 3 W (24 V)
Signal input		Trigger
Digital interface		RS232 / RS422
Analog output		4 ... 20 mA (16 bit, freely scalable within the measuring range)
Switching output		Q1 / Q2 (configurable); trigger
Connection		Supply/signal: 12 pin M12 screw/plug connection
Mounting		Mounting holes
Temperature range	Storage	-40 ... +70 °C (non-condensing)
	Operation	-20 ... +60 °C (non-condensing)
Shock (DIN EN 60068-2-29)		30 g / 6 ms in 6 directions, 3 shocks each
Vibration (DIN EN 60068-2-6)		1 g / 10 ... 2000 Hz in 3 axes, 2 cycles each
Protection class (DIN EN 60529)		IP67
Material		Aluminum housing
Weight		approx. 140 g
Control and indicator elements		2x LEDs for power and signal
Special features		Measurement-specific operating modes

^[1] Depends on the reflectivity of the target, ambient light interference and atmospheric conditions


^[2] ILR-RF250 reflector film 250 x 250 mm; art. 7966001

^[3] 0.5 m for measurement with reflector film

^[4] Linearity in the ranges of ≤ 1 m and ≥ 70 m is ±100 mm

^[5] Repeatability in the ranges ≤ 1 m and ≥ 70 m is ±50 mm

Light spot diameter

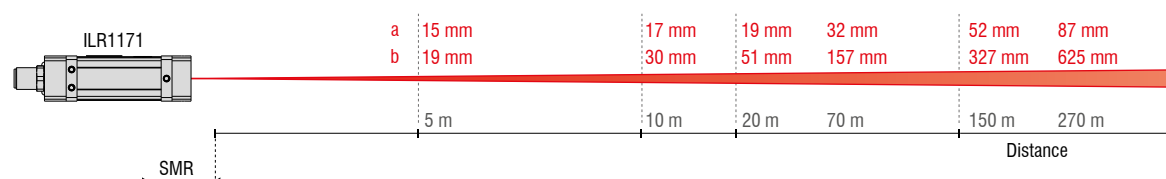

The optoNCDT ILR 1171 sensors use a semiconductor class 1 laser (operating mode) and a semiconductor class 2 laser (setup mode). Devices of this laser classes require no special safety precautions.

Connection possibilities optoNCDT ILR



ILR104x



Supply and output cables

29011586	PC1040-10	Supply-/output cable, 10 m
29011587	PC1040-2	Supply-/output cable, 2 m
29011588	PC1040/90-2	Supply-/output cable, 2 m
29011589	PC1040-5	Supply-/output cable, 5 m
29011590	PC1040/90-5	Supply-/output cable, 5 m
29011590	PC1040-10	Supply-/output cable, 10 m
29011591	PC1040/90-10	Supply-/output cable, 10 m
29011592	PC1040-20	Supply-/output cable, 20 m
29011593	PC1040/90-20	Supply-/output cable, 20 m



ILR2250-100-IO



Supply and output cables

29011362	PC2250-5 IO-Link	Supply-/output cable, 5 m
29011363	PC2250-10 IO-Link	Supply-/output cable, 10 m
29011364	PC2250-15 IO-Link	Supply-/output cable, 15 m



ILR3800-100
ILR3800-100-H



Supply and output cables

29011609	PCF3800-30/IF2004	Supply-/output cable, 30 m
----------	-------------------	----------------------------

(The IF2008-Y adapter cable is required to connect 4x ILR sensors to the IF2004).

Connection cables

29011624	PCE3800-20/IF2008ETH	Connection cable, 20 m
29011623	PCE3800-10/IF2008ETH	Y-connection cable, 10 m
29011622	PCE3800-10/IF2008ETH	Connection cable, 10 m
29011621	PCE3800-5/IF2008ETH	Connection cable, 5 m
29011620	PCE3800-2/IF2008ETH	Connection cable, 2 m



Power supply unit PS2020
(Optional for DIN rail
mounting)



Supply and output cables

29011513	PC3800-2	Supply-/output cable, 2 m
29011514	PC3800/90-2	Supply-/output cable, 2 m
29011515	PC3800-5	Supply-/output cable, 5 m
29011516	PC3800/90-5	Supply-/output cable, 5 m
29011517	PC3800-10	Supply-/output cable, 10 m
29011518	PC3800/90-10	Supply-/output cable, 10 m
29011519	PC3800-20	Supply-/output cable, 20 m
29011520	PC3800/90-20	Supply-/output cable, 20 m
29011521	PC3800-30	Supply-/output cable, 30 m
29011522	PC3800/90-30	Supply-/output cable, 30 m






ILR1171



Supply and output cables

29011401	PC1171-2	Supply-/output cable, 2 m
29011402	PC1171-5	Supply-/output cable, 5 m
29011403	PC1171-10	Supply-/output cable, 10 m

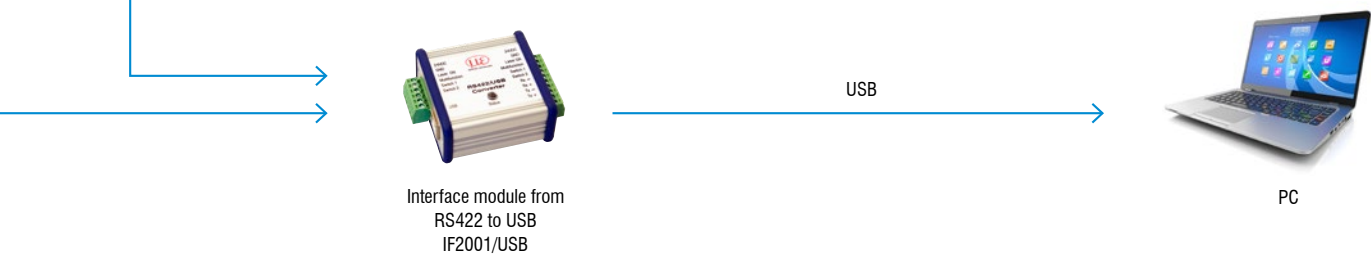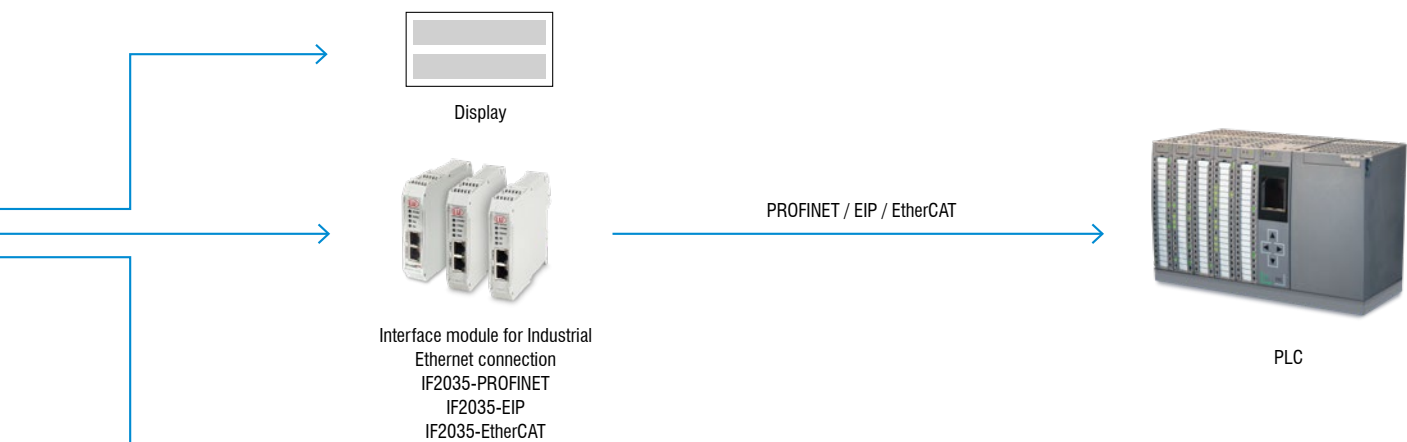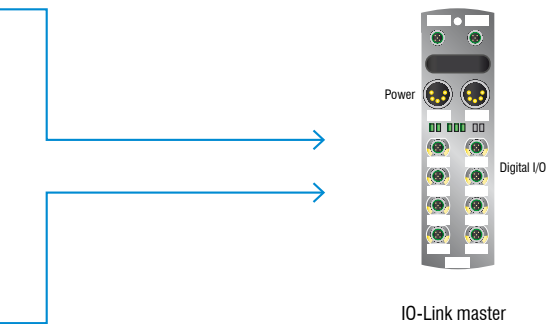

Optional accessories

optoNCDT ILR

Reflector film

The sensor measures the distance to moving and stationary objects. The measurable distance can be increased by using a reflective film suitable for the sensor. However, the minimum distance from the sensor to the reflector film must be maintained. The center of the laser spot must be in the center of the reflector over the entire measuring range. Target (reflector) and sensor can only be tilted by at most 5° relative to one another.

Sensor	Item	Dimensions
optoNCDT ILR140x	Art. no.: 7966001 ILR-RF250 Reflector film	250 x 250 mm
optoNCDT ILR2250	Art. no.: 7966058 ILR-RF210 Reflector film	210 x 297 mm
optoNCDT ILR3800	Art. no.: 7966058 ILR-RF210 Reflector film	210 x 297 mm
optoNCDT ILR1171	Art. no.: 7966001 ILR-RF250 Reflector film	250 x 250 mm



Protective glass

The sensor can be protected from external influences by using a protective glass.

Sensor	Item	Description
optoNCDT ILR2250	Art. no.: 7966061 ILR-PG2250 Protective glass	Optical glass, with anti-reflection coating and high transmission
optoNCDT ILR3800	Art. no.: 7966080 ILR-PG3800 Protective glass	



Filter glass

Filter glasses enable measurement on highly reflective surfaces. However, this reduces the maximum laser power. Ask your regional sales contact before you use the filter glass.

Sensor	Item	Description
optoNCDT ILR2250	Art. no.: 7966063 ILR-NDF2250 Filter glass 0.75	Optical gray filter
	Art. no.: 7966066 ILR-NDF2250 Filter glass 0.5	
	Art. no.: 7966068 ILR-NDF2250 Filter glass 0.9	
optoNCDT ILR3800	Art. no.: 7966081 ILR-NDF3800 Filter glass 0.75	
	Art. no.: 7966082 ILR-NDF3800 Filter glass 0.5	
	Art. no.: 7966083 ILR-NDF3800 Filter glass 0.9	



Air purge collar

A compressed-air purge collar reliably prevents the deposition of dust and particles on the lens surface, ensuring that the optical performance remains consistently high. In addition, this reduces the cleaning effort and extends the service life of the system.


Sensor	Item	Description
optoNCDT ILR2250	Art. no.: 7966062 ILR-FBV2250 Air purge collar	Screwable compressed-air purge collar for cleaning the optical path
optoNCDT ILR3800	Art. no.: 7966087 ILR-FBV3800 Air purge collar	




Mounting plate

The sensor can optionally be fixed using an aluminum plate for mounting. This ensures a secure hold and easy alignment of the sensor. Its robust design is suitable even for harsh industrial environments.


Sensor	Item	Description
optoNCDT ILR3800	Art. no.: 7966076 ILR-MP3800 Mounting plate	Optional; for easy sensor mounting

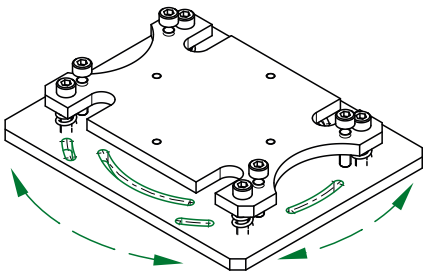


The sensor can optionally be mounted using a mounting plate.

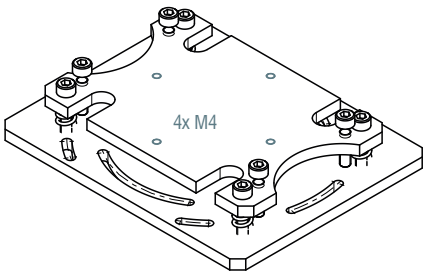

4 mounting threads M4 for sensor mounting, optional: sensor rotated by 90°.

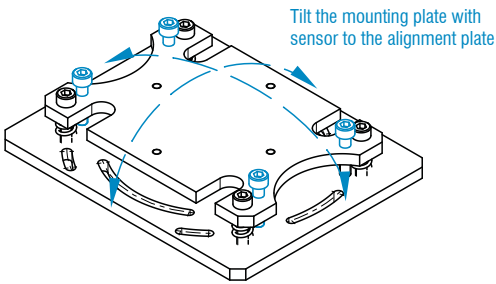

Tilt the mounting plate with sensor to the alignment plate

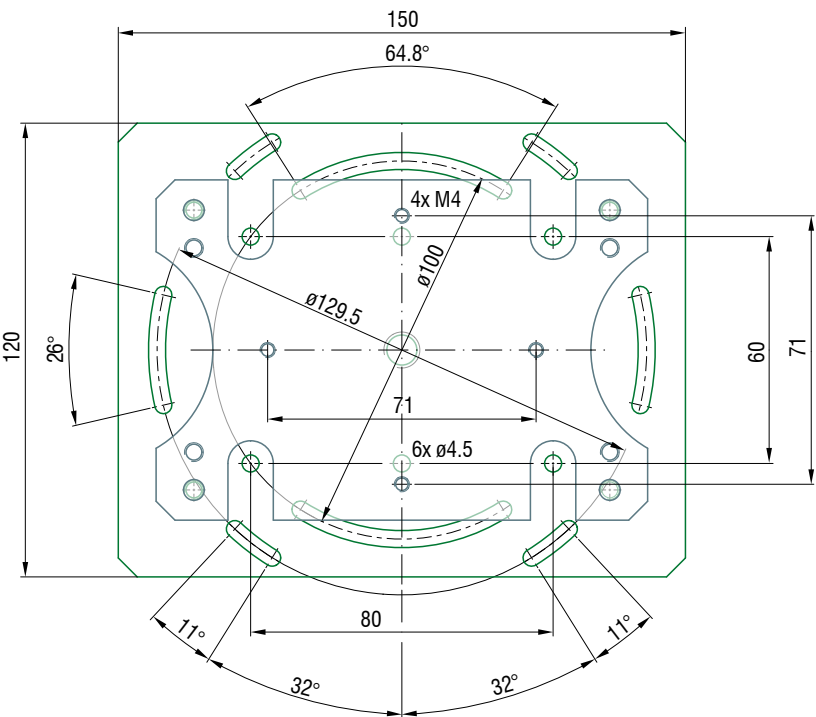

(dimensions in mm, not to scale)

Sensors and Systems from Micro-Epsilon



Sensors and systems for displacement, distance and position



Sensors and measurement devices for non-contact temperature measurement



Measuring and inspection systems for metal strips, plastics and rubber



Optical micrometers and fiber optics, measuring and test amplifiers



Color recognition sensors, LED analyzers and inline color spectrometers



3D measurement technology for dimensional testing and surface inspection